



PROTEUS

Infinite possibilities

RF AWG Desktop Platform

Introducing Tabor's new addition to its industry leading Proteus, Arbitrary Waveform generators/Transceivers series. The new RF AWG/AWT offers a built in IQ modulator with advanced capabilities for multi-channel RF signal generation. The small footprint system, that can generate up to 12 channels in a single box, offers industry leading performance, various configuration options, an innovative task oriented programming, and user programmable FPGA. So whether it is for aerospace and defense, telecommunications, automotive, medical or high-end physics applications Proteus opens the door to a world of infinite possibilities.

Leading Features:



Twelve channels 9GS/s 16 bit, AWG & AWT configurations



Real time data streaming directly to the FPGA for continuous and infinite waveform generation



Space efficient Desktop platform, with USB 3.0, 10G Ethernet and Thunderbolt high speed interfaces.

Innovative task oriented sequence programming for maximum flexibility to generate any imaginable scenario

Integrated digital up-converter to RF frequencies for coherent multi-channel RF applications

Up to 8GS waveform memory with the ability to simultaneously generate and download waveforms

Customizable FPGA for user embedded IP and application specific requirements

Excellent phase noise and spurious performance


8GHz Bandwidth, 5.4GS/s 12 bit digitizer option for feedback control system and conditional waveform generation

COMPACT AND SPACE EFFICIENT

The desktop version of the Proteus series offers up to 12 channels in a 4U, half 19" dedicated chassis. The compact form size and small footprint saves valuable bench space. So for synchronized, phase coherent, multi-channel applications such as quantum physics and radar applications the Proteus arbitrary waveform transceiver is an ideal, space efficient and cost effective solution.

DIRECT GENERATION OF COMPLEX RF SIGNALS

The new addition to the Proteus series offers an integrated Numerically Controlled Oscillator (NCO), digital interpolator and IQ modulator for generation of complex RF signals directly from the Proteus instrument. The internal digital-up-converter enables direct generation of IQ modulation signals eliminating limitations such as IQ mismatch, and in-band carrier feed-through that are present with external IQ modulators and mixers. Also, by reducing the waveform size with up to x8 interpolation factor it saves on critical processing and compilation times present in many test and simulation systems. Coherent multiple-channel RF signal generation across multiple modules for applications such as Phase-Array Radar, Massive MIMO and Beamforming, or Quantum Computing can be easily implemented.

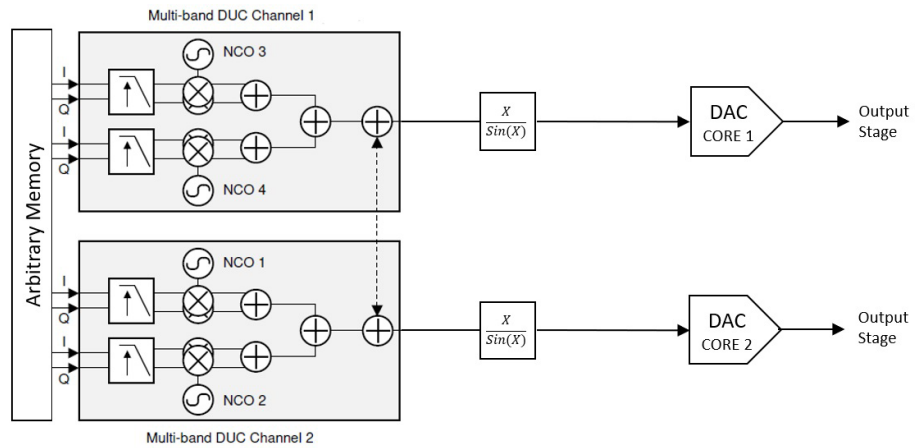

ULTRA-FAST COMMUNICATION INTERFACE

Spending more time setting up your generated scenario than actually running it? The Proteus desktop platform offers an embedded PC with PCIe Gen3 x4 lanes interface as well as the fastest standardized communication interfaces commonly available in PCs today. These include USB3.0 and 10GE interfaces as well as, a thunderbolt 3 interface which enables up to 40Gb/s of data transfer speed. These enable the user to easily connect to the Proteus arbitrary waveform transceiver and still offer some of the fastest waveform download available on the market today, saving you one of your most valuable resources, time.

FEEDBACK CONTROL SYSTEM

The Proteus AWT integrates both DAC and ADC in one system, controlled by a single FPGA for optimal synchronization and minimum latency. This high speed control system provides a feedback loop for fast decision making.

GENERATE ANY IMAGINABLE SCENARIO

Innovative task oriented sequence programming where you can change the full instrument setup at every line of the task table. Not only can you generate and download waveforms simultaneously, you can stream data directly to the FPGA without the need to use the built in memory. This enables generating random, complex, unique and infinitely long scenarios directly from the controlling PC at DAC speeds of up to 3GS/s.

GENERAL CHARACTERISTICS		P9484/8/12D
NUMBER OF CHANNELS		
Standard		4/8/12
x1 Mode		2/4/6
MAX. SAMPLE RATE		9GS/s
MAX. INPUT DATA RATE		
Standard		2.5GS/s
x1 Mode		9GS/s
RESOLUTION		16-bit
ANALOG BANDWIDTH		8GHz
MAX. MEMORY SIZE		Up to 8GS

INTER-CHANNEL SKEW CONTROL		
INITIAL SKEW		<20ps
FINE DELAY		
RANGE		0 to 5 ns
RESOLUTION		5ps
ACCURACY		±5ps
COARSE DELAY		
RANGE		0 to wavelength
RESOLUTION		1 sample point

ARBITRARY MODE		
NUMBER OF SEGMENTS		64k
MINIMUM SEGMENT LENGTH		
NORMAL	<u>x1 Mode</u>	<u>Standard</u>
FAST SEGMENT	2048 points	1024 points
	224 points	64 points
WAVEFORM GRANULARITY		
STANDARD	<u>x1 Mode</u>	<u>Standard</u>
OPTIONAL	64 points	32 points
	32 points	16 points

TASK MODE		
TASK TABLE LENGTH		64K tasks per channel
TASK LOOPS		1M
SEQUENCE ⁽¹⁾		
MAX. NUMBER OF SEQUENCES		32K sequences
SEQUENCE LOOPS		1M
SCENARIO ⁽²⁾		
MAX. NUMBER OF SCENARIOS		1K scenarios

STREAMING (STM OPTION)		
MAX. STREAM RATE		Up to 3GS/s
MINIMUM PC REQUIREMENTS		
CPU		i7
MEMORY		32GB
OPERATING SYSTEM		WINDOWS 10
SOURCE		Internal / Rear panel interfaces

SIGNAL PURITY		
HARMONIC DISTORTION ⁽³⁾		
f _{out} = 10 MHz - 200 MHz, Measured @ DC to 2 GHz		< -70 dBc (typ.)
f _{out} = 200 MHz ... 1.5 GHz, Measured @ DC to 4.5 GHz		< -60 dBc (typ.)
f _{out} = 1.5 GHz ... 4.5 GHz, Measured @ DC to 4.5 GHz		< -50 dBc (typ.)
SFDR ⁽⁴⁾		
f _{out} = 10 MHz...500 MHz, Measured @ DC to 1.5 GHz		< -85 dBc (typ)
f _{out} = 500 MHz...4.5 GHz , Measured @ DC to 4.5 GHz		< -75 dBc (typ)
PHASE NOISE (@10kHz offset)		
f _{out} = 140.625MHz		-134 dBc/Hz
f _{out} = 280.25MHz		-128 dBc/Hz
f _{out} = 562.5MHz		-122 dBc/Hz
f _{out} = 1.125GHz		-116 dBc/Hz
f _{out} = 2.25GHz		-110 dBc/Hz
f _{out} = 4.5GHz		-104 dBc/Hz

DIRECT OUTPUT		
OUTPUT TYPE		AC coupled
IMPEDANCE		50Ω (nom)
AMPLITUDE ⁽⁵⁾		
Single-ended		1mV to 550mVpp
Differential		1mV to 1.1Vpp
AMPLITUDE RESOLUTION		1mV
AMPLITUDE ACCURACY		±(3% of amplitude ±2 mV)
RISE/FALL TIME (20% TO 80%)		< 60 ps (typ)
INSTANTANEOUS BANDWIDTH		
Standard		1.25GHz
x1 Mode		4.5GHz
MAX. USABLE FREQUENCY		2nd Nyquist, 8GHz
SKEW BETWEEN NORMAL AND COMPLEMENT OUTPUTS		0ps
JITTER (PEAK-PEAK)		< 15 ps (typ)
CONNECTOR TYPE		SMA

SAMPLE CLOCK OUTPUT		
SOURCE		Selectable, internal synthesizer or sample clock input
FREQUENCY RANGE		SCLK Range
OUTPUT AMPLITUDE		0.5V to 1V depending on SCLK
IMPEDANCE		50Ω (nom), AC coupled
CONNECTOR		SMA

- (1) A sequence is defined as a continuous and looped series of tasks
(2) A scenario is defined as a continuous series of tasks/sequences
(3) SCLK=Max sample rate, amplitude = 400mVpp, Direct mode, measured using balun
(4) SCLK=Max sample rate, amplitude = 400mVpp, excluding SCLK/2-fout, measured using balun
(5) Double into open impedance

PROTEUS

Infinite possibilities

SYNC CLOCK OUTPUT	
AMPLITUDE	500mVpp, typ.
FREQUENCY Standard x1 Mode	SCLK/8 SCLK/32
WAVEFORM	Square
RISE/FALL TIME (20% TO 80%)	<150ps
IMPEDANCE	LVC MOS
CONNECTOR	SMP

REFERENCE CLOCK OUTPUT	
SOURCE	Internal TCXO
WAVEFORM	Square
FREQUENCY	100MHz or REF IN
STABILITY	+/- 2.5 PPM
AGING	+/- 1 PPM @ +25°C (per year)
CONNECTOR	SMP

MARKER OUTPUTS		P9484/8/12D
NUMBER OF MARKERS		8/16/24
OUTPUT TYPE		Single Ended
OUTPUT IMPEDANCE		50Ω (nom)
AMPLITUDE		
VOLTAGE WINDOW		±1.15V
RESOLUTION		10mVpp
ACCURACY		±7%
OFFSET		
RANGE		±0.5V
RESOLUTION		10mV
ACCURACY		±(3% of setting+1% of amp ±15 mV)
RISE/FALL TIME (20% TO 80%)		<200ps
MARKER LENGHT		0 - waveform length
RESOLUTION Standard x1 Mode		2 pts 8 pts
MARKER DELAY		
COARSE DELAY		
RANGE		0 to 2048 points
RESOLUTION Standard x1 Mode		8 points 32 points
FINE DELAY		
RANGE		0 to 1.2ns
RESOLUTION		1ps
ACCURACY		15ps
CONNECTOR TYPE		SMP

DIGITIZER CHARACTERISTICS (AWT OPTION)	
NUMBER OF CHANNELS	1 or 2
INPUT VOLTAGE RANGE	500 mVpp (full scale)
INPUT VOLTAGE OFFSET	-2V to +2V
INPUT FREQUENCY RANGE	9GHz
RESOLUTION	12 bits
ACQUISITION MEMORY	Up to max. arbitrary memory
SAMPLE CLOCK SOURCES	Internal or external
INTERNAL CLOCK SOURCE	Internal, external reference
MAX SAMPLING RATE	5.4GS/s in Single channel mode 2.7Gs/s in Dual channel mode
MIN SAMPLING RATE	800MS/s
CLOCK ACCURACY	<2 ppm
IMPEDANCE	50Ω
COUPLING	DC or AC (factory configured)
CONNECTOR	SMA
TRIGGER SYSTEM	
TRIGGER MODES	Positive, negative edge
TRIGGER SOURCES	External, Software, Channel
COUPLING	DC
IMPEDANCE	50Ω (nominal)
LEVEL RANGE	>± 2.5 V (nominal)
FREQUENCY RANGE	DC to 65MHz
CONNECTOR	SMA

TRIGGER INPUTS	
RANGE	-5 V to +5 V
THRESHOLD	±5 V
RESOLUTION	100 mV
SENSITIVITY	200 mV
JITTER Standard x1 Mode Low Trigger Jitter Opt.	8 SCLK periods 32 SCLK periods SQRT(SCLK period ² + 150e-12 ²)
LATENCY / SYSTEM DELAY Standard x1 Mode	<900SCLK periods <2700 SCLK Periods
POLARITY	Pos or Neg
SOURCE	Selectable between channels
INPUT IMPEDANCE	10 kΩ or 50Ω (nom), DC coupled, factory configured
MAX TOGGLE FREQUENCY	10MHz (50MHz optional)
MINIMUM PULSE WIDTH	50ns (5ns optional)
CONNECTOR TYPE	SMP

REFERENCE CLOCK INPUT	
INPUT FREQUENCIES	10MHz / 100MHz selectable
LOCK RANGE	± 1MHz
INPUT LEVEL	0.6 Vp-p to 1.7 Vp-p
IMPEDANCE	50Ω, AC coupled (nom)
CONNECTOR TYPE	SMP

SAMPLE CLOCK INPUT	
FREQUENCY RANGE	SCLK Range
INPUT LEVEL RANGE	0.4Vpp to 1.2Vpp
DAMAGE LEVEL	<-0.5V or >1.5V
INPUT IMPEDANCE	50Ω nom, AC coupled
CONNECTOR TYPE	SMA

FAST SEGMENT DYNAMIC CONTROL INPUT (OPTIONAL)	
INPUT SIGNALS	Data 6 bit, Channel select 2 bit, Valid 1 bit
SEGMENTS / SEQUENCES	64 fast
DATA RATE	35MHz
MINIMUM LATENCY (Dynamic control input to direct out)	
FAST SEGMENT	<250ns
NORMAL SEGMENT	<1μ
INPUT LEVEL	LVTTL
CONNECTOR	D-SUB 9-Pin

DIGITAL UPCONVERTER	
MODES	NCO / Interpolation / IQModulation
SAMPLING RATE	1GS/s to Max sample rate
CARRIER FREQUENCY	
RANGE	0 to 40% of Sampling rate
RESOLUTION	48 bit
PHASE RANGE	0 to 360°
PHASE RESOLUTION	16 bit
INTERPOLATION FACTORS	x2, x4, x8
IQ FORMAT	x2 Mode x4 Mode x8 Mode
IQ PAIR PER CHANNEL	1 1 1 or 2
MAX INPUT RATE	2,500MS/s 2,250MS/s 1,125MS/s
NUMBER OF CHANNEL	2 2 4
SFDR AND HARMONICS	Same as Arbitrary
MEMORY	Same as Arbitrary

GENERAL	
VOLTAGE RANGE:	100 to 264VAC
FREQUENCY RANGE:	47Hz to 63Hz
POWER CONSUMPTION:	550W max.
FPGA TYPE	Xilinx Kintex UltraScale XCKU060 upgradeable to XCKU115
INTERNAL PROCESSING	CPU MEMORY STORAGE OPERATING SYSTEM
	Intel Pentium 3M Cache, 2.20GHz 8GB (Upgradeable) 120GB (Upgradeable) WINDOWS 10 IoT
INTERFACE:	
USB	1 x front panel USB host (type A) 2 x rear panel USB host, (type A) 1 x rear panel USB Device (type C)
Thunderbolt (Optional)	1 x rear panel Thunderbolt3
LAN (BASE-T)	1 x rear panel RJ45 1000/100/10
SFP+ (Optional, Replaces RJ45)	1 x rear panel SFP+ 10G Optical
GPIB (Optional)	IEEE 488.2 – GPIB
DISPLAY	1 x rear panel HDMI
WEIGHT	
Without Package	7.5 kg
Shipping Weight	9 kg
DIMENSIONS:	
With feet	175 X 221 x 316 mm (W x H x D)
Without feet	175 X 235 x 316 mm (W x H x D)
TEMPERATURE:	
OPERATING	0°C to +40°C
STORAGE	-40°C to +70°C
WARM UP TIME	15 minutes
HUMIDITY:	85% RH, non-condensing
SAFETY:	CE Marked, EC61010-1:2010
EMC:	IEC 61326-1:2013
CALIBRATION:	2 years
WARRANTY*:	3 year standard * 1 year standard in India

PROTEUS

Infinite possibilities

ORDERING INFORMATION

MODEL	DESCRIPTION
P9484D	9GS/s 16Bit 8GS Mem 4CH 8 Markers RF AWG Desktop
P9488D	9GS/s 16Bit 8GS Mem 8CH 16 Markers RF AWG Desktop
P94812D	9GS/s 16Bit 8GS Mem 12CH 24 Markers RF AWG Desktop

OPTIONS

DC1	DC output for IQ baseband applications for model P9482D
DC2	DC output for IQ baseband applications for model P9484D
DC3	DC output for IQ baseband applications for model P9488D
DC4	DC output for IQ baseband applications for model P94812D
DJ1	Dynamic Jump Input option for model P9482D
DJ2	Dynamic Jump Input option for model P9484D
DJ3	Dynamic Jump Input option for model P9488D
DJ4	Dynamic Jump Input option for model P94812D
MRK1	x8 Extra Markers option for model P9482D
MRK2	x8 Extra Markers option for model P9484D
MRK3	x16 Extra Markers option for model P9488D
LTJ1	Ultra Low Trigger Jitter (200ps typ.) option for model P9482D
LTJ2	Ultra Low Trigger Jitter (200ps typ.) option for model P9484D
LTJ3	Ultra Low Trigger Jitter (200ps typ.) option for model P9488D
LTJ4	Ultra Low Trigger Jitter (200ps typ.) option for model P94812D
G1	Low Waveform Granularity option for models P9482D
G2	Low Waveform Granularity option for model P9484D
G3	Low Waveform Granularity option for model P9488D
G4	Low Waveform Granularity option for model P94812D
SEC	Removable SSD
SSD	Extra Factory Duplicated Solid State Drive (SSD) for option SEC
TRG	Faster trigger input (50MHz instead of 10MHz)
AWT	5.4GS/s Single, 2.7GS/s Dual Channel 12 Bit Digitizer
STM	Streaming
TBolt	Rear panel Thunderbolt3 USB (type C)
SFP+	Rear panel 10G optical SFP+ connectivity (replace the LAN)

The contents of this document are provided by Tabor Electronics, 'as is'. Tabor makes no representations nor warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to the specification at any time without notice. Ver 2.2